
AMPFIBIAN S1000DX WEATHERPROOF 15A CARAVAN SURGE PROTECTOR with OUTLET TESTER Mfgr.# 79696


INSTRUCTIONS

- 1. Unclip both HOUSING CLIPs (3) to open unit.
- 2. Rotate LEVER CLAMP (5) until it latches into place.
- 3. Insert plug into SURGE (9) in LOWER HOUSING (2).
- 4. ClampS (5, 6) release automatically when LID (1) is closed.
- 5. Ensure both HOUSING CLIPs (3) are fully latched.
- 6. Optional: use FLIP-OUT HANGER (7) to hang up.
- 7. Optional: place padlock through SECURING LOOP (8).
- **UPPER HOUSING (LID)**
- 2 LOWER HOUSING
- 3 HOUSING CLIPS
- CORD SEALS
- 5 LEVER CLAMP
- 6 CLAMP
- 7 FLIP-OUT HANGER
- SECURING LOOP
- SURGE PROTECTOR


inc. OUTLET TESTER S1000D

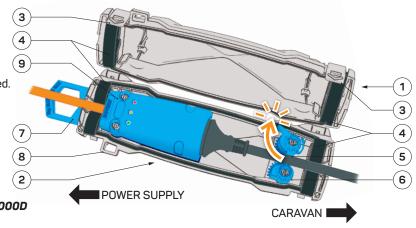

CONNECTION GUIDE



INDICATOR LIGHTS



Use Ampfibian replacement cartridges: \$1000D SURGE PROTECTOR with OUTLET TESTER \$500 SURGE PROTECTOR





ampfibian.com.au ampfibian.co.nz

Freecall Australia 1800 342-426

HOUSING OPERATION

WARNINGS

- Do not operate frozen seals: allow to thaw before opening/closing!
- Do not expose to petrol, oil, solvents, harsh chemicals, etc.!
- Do not use in hazardous areas and/or in the presence of corrosive, oxidising and/or explosive materials, gases, vapours, etc.!
- Do not use if seals missing or damaged!
- Do not immerse!
- Do not disassemble!
- Temporary use only, not for permanent installation!
- Only insert cords if dry and if unit is dry inside!
- Do not bury!
- Do not use if housing is damaged!
- Disconnect power supply before handling connections!

(X)







- Suitable for ordinary and heavy duty cords from Ø8mm to Ø12mm diameter. Cleats successfully tested to 100kg.
- Impact rated to IKO9.
- Ingress protected to IP55.

INSTRUCTIONS

- Use clean and undamaged electrical cords.
- Check all seals are in place, undamaged and clean.
- Ensure clamps rotate freely before use.
- Confirm housing clips are fully latched when closed.
- Store open (un-latched) in a dry place out of direct sunlight.
- Remove condensation/moisture with a clean dry cloth.

- The housing seals to IP55 with cords up to Ø12mm (almost Ø1/2") when closed, and maintains IP55 without cords inserted.
- The clamps help to retain cords from Ø8mm to Ø12mm. Smaller diameter cords are sealed, but not retained.
- Clamps provide protection from accidental disconnection, but cords must not be under permanent tension while in use.
- Differences between temperature, pressure and humiditu inside and outside the unit will lead to condensation inside.
- Electricity is dangerous, use caution!

SURGE PROTECTOR SPECIFICATIONS

Model S1000D (replacement cartridge)

1000 Joules Max. surge Plug and socket 15A three flat pins 1.5mm² - heavy duty lead Conductor size Electrical ratings 240VAC 50Hz 15A 3600W Standards compliance AS/NZS-3120:2011

WARNING: Insulation testing above 250V may cause device failure!

LIMITED WARRANTY

Every Ampfibian product is thoroughly inspected and tested before leaving our factory. Ampfibian Pty. Ltd. limits this warranty against defective workmanship and faulty materials for twelve (12) months from date of purchase (proof of date of purchase must be provided) and undertakes at its option to repair or replace each product or part thereof on condition that: (a) the product has not been subject to misuse, neglect, accidents or alterations; (b) the unit has been used and maintained as per the instructions. Ampfibian Pty. Ltd. is not liable for any consequential damage to either people, work or facilities from using the product. Surges above the stated Joule rating will disable the unit permanently; replace unit for continuing protection. Loss of surge protection is NOT covered under this warranty. Buyers sole remedy against manufacturer shall be the replacement of the defective product. Because applications vary, no use or suitability warranty is implied or intended. It is the buyers responsibility to determine if the product will adequately protect the user. Careful analysis should be made before selecting equipment for a particular work environment. Please see the "Return & Refund Policy" page on our website or contact us for details. All shipping costs are the responsibility of the customer. Please include your purchase receipt (or a copy) as proof-of-purchase in the event of a warranty claim.

Register your warranty online at ampfibian.com.au





Dispose of surge protector,

housing seals and springs in

household rubbish. Recycle

clear housing & orange parts.

2204-INSTRUCT CRV-C



Ampfibian Pty Ltd 3/33 Southern Cross Drive Ballina NSW 2478 Australia sales@ampfibian.com.au Freecall 1800 342-426

ampfibian.com.au

TÜVRheinland®





